VC999®

PACKAGING plus+

TRAY SEALING MACHINES



TS455

MAX TRAY DIMENSIONS

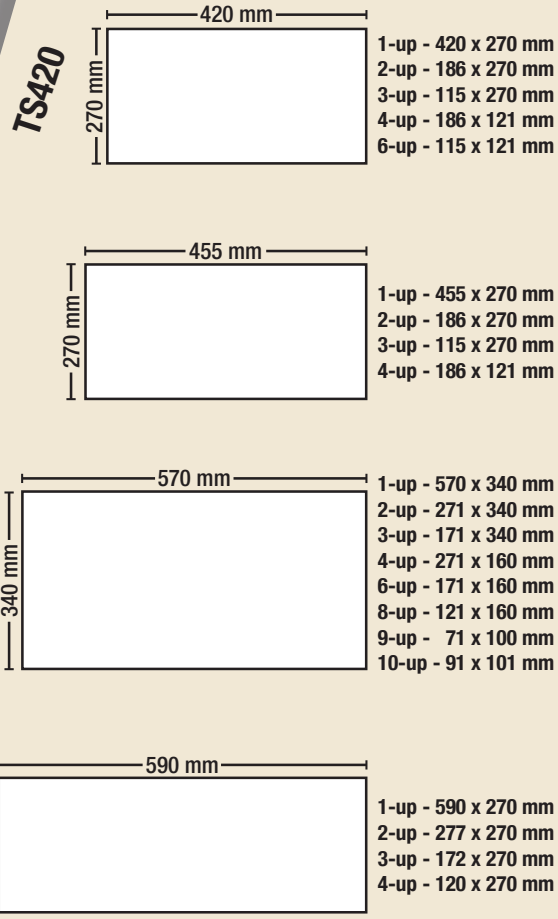

Perfect For Packaging:

- Ready-to-Eat Meals
- Meats
- Fruits & Vegetables









FEATURES

Packaging Plus Tray Sealing Machines are designed for efficiency and reliability, with up to three operation modes available, our tray sealers adapt easily to your production needs. Built to accommodate a wide range of standard U.S. and European tray sizes. Each machine is engineered with hygiene in mind, featuring an easy-to-clean design that eliminates bacteria harbor points.

BENEFITS

- Stainless steel construction
- Digital controls with up to 10 storable programs
- 3 operation modes (seal, gas flush, & skin)
- Flexible tooling designs
- 12-month warranty on parts - 90 day warranty for labor
- Operators manual & spare parts kit included

MODEL	TS420	TS455	TS540	TS690A
Max Tray Dimensions				
Width	400 mm 15.7 in	420 mm 16.5 in	570 mm 22.5 in	510 mm 20.1 in
Depth	270 mm 10.6 in		340 mm 13.4 in	270 mm 10.6 in
Height	15 - 100 mm (min-max) 0.6 - 3.9 in (min-max)			20 - 100 mm (min-max) 0.8 - 3.9 in (min-max)
Common Tray sizes SEL (Short Edge Leading) LEL (Long Edge Leading)	**USA** # 3 SEL tray (2 up) # 5 - SEL Universal tray (1 up) # 9 - LEL Family tray (1 up) # 10 - LEL Plastic tray (1 up)	**USA** # 3 SEL tray (2 up) # 5 - SEL Universal tray (1 up) # 9 - LEL Family tray (1 up) # 10 - LEL Plastic tray (1 up)	**USA** # 3 SEL tray (3 up) # 5 - SEL Universal tray (2 up) # 9 - LEL Family tray (2 up) # 10 - LEL Plastic tray (3 up)	**USA** # 3 SEL tray (3 up) # 10 - SEL Plastic tray (2 up)
Tooling	***Custom Tooling for Tray Sealing Machines Available***			

Machine Specifications				
Machine Dimensions	780 x 900 x 1470 mm 30.7 x 35.4 x 57.9 in	1100 x 1040 x 1490 mm 43.3 x 41 x 58.6 in	1290 x 1040 x 1490 mm 50.8 x 41 x 58.6 in	3340 x 1100 x 1550 mm 131.5 x 43.3 x 61 in
Weight	286 kg 630 lbs	336 kg 740 lbs	430 kg 948 lbs	1203 kg 2652 lbs
Pump Size	63 m^3/h - 3 hp		100 m^3/h - 5 hp	240 m^3/h - 5.6 hp
Electrical Connection	220 V / 3 ph / 60 Hz / 20 A (optional 400 V / 3 ph / 50 Hz / 10 A)			220 V / 3 ph / 60 Hz / 30 A (optional 400 V / 3 ph / 50 Hz / 20 A)
Single Phase Option	Yes			No
Air Pressure Req.	2 CFM @ 90 PSI		4 CFM @ 90 PSI	10 CFM @ 90 PSI
Cycles Per Minute	Up to 5 seal / 3 gas	Up to 5 seal / 3 gas / 5 skin	Up to 5 seal / 3 gas	Up to 8 seal / 4 gas / 5 skin
Packaging Type	MAP / Lidding	MAP / Lidding / Skin Pack	MAP / Lidding	MAP / Lidding / Skin Pack

Email us at Sales@VC999.com with any of your questions!

UNITED STATES: Sales@VC999.com
North Kansas City - 1 800-728-2999

CENTRAL/SOUTH AMERICA: Sales.Americas@VC999.com
1-800-728-2999

COLOMBIA: Sales.Colombia@VC999.com
57 (1) 8966546 or 8966798

CANADA: Sales.Canada@VC999.com
Montreal - 1 819-395-4555

MEXICO: Sales.Mexico@VC999.com
Monterrey - 52 81 8361 3178
Mexico City - 52 55 5876 7784

VC999®
www.VC999.com
PACKAGING plus+